FORM PTO-1390 (REV 10-97) U S Department of Commerce Patent and Trademark Office

TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NUMBER: CE30382P

U.S. APPLICATION NO.: 09/530310

INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/EP98/06985	21 OCTOBER 1998	27 OCTOBER 1997

TITLE OF INVENTION:

COMMUNICATION SYSTEM AND METHOD FOR COMMUNICATION

APPLICANT(S) FOR DO/EO/US
JEPSEN, ET AL.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. [X] This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.

2. [ ] This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S C. 371.

3. [X] This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the application time limit set in 35 U S.C 371(b) and PCT Articles 22 and 39(1).

4. [ ] A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.

5. [X] A copy of the International Application as filed (35 U.S.C. 371(c)(2))
   a. [ ] are transmitted herewith (required only if not transmitted by the International Bureau).
   b. [X] has been transmitted by the International Bureau.
   c. [ ] is not required, as the application was filed in the United States Receiving Office (RO/US).

6. [ ] A translation of the International Application into English (35 U.S.C. 371 (c)(2)).

7. [ ] Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
   a. [ ] are transmitted herewith (required only if not transmitted by the International Bureau).
   b. [ ] has been transmitted by the International Bureau.
   c. [ ] have not been made; however, the time limit for making such amendments has NOT expired.
   d. [ ] have not been made and will not be made.

8. [ ] A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))

9. [ ] An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).

10. [ ] A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern other document(s) or information included:

11. [ ] An Information Disclosure Statement under 37 CFR 1.97 and 1.98.

12. [ ] An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3 28 and 3.31 is included.

13. [ ] A FIRST preliminary amendment.
    [ ] A SECOND or SUBSEQUENT preliminary amendment.

14. [ ] A substitute specification.

15. [ ] A change of power of attorney and/or address letter.

16 [ ] Other items or information:

U S Application No (if known, see 37 CFR1.5)	International Application No.	Attorney Docket Number
09/530310	PCT/EP98/06985	CE030382P

	CALCULATIONS	PTO USE ONLY
17. [X] The following fees are submitted:		
Basic National Fee (37 CFR 1.492(a)(1)-(5):		
Search report has been prepared by the EPO or JPO $930.00		
International preliminary examination fee paid to USPTO (37 CFR 1.482) $720.00		
No International preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445 (a)(2)).....$790.00		
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO $1,070.00		
Intentional preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4).....$98.00		
ENTER APPROPRIATE BASIC FEE AMOUNT =	$ 930.00	
Surcharge of $130.00 for furnishing the oath and declaration later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(e)). +	$	

Claims	Number Filed	Number Extra	Rate		
Total Claims	11 - 20 =		X $22.00	$	
Independent Claims	2 - 3 =		X $82.00	$	
Multiple dependent claim(s) (if applicable)			+$270.00	$	
TOTAL OF ABOVE CALCULATIONS =				$ 930.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).				$	
SUBTOTAL:				$ 930.00	
Processing fee of $130.00 for furnishing the English translation later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(f)). +				$	
TOTAL NATIONAL FEE =				$ 930.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). $40.00 per property +				$	
TOTAL FEES ENCLOSED =				$ 930.00	
				Amount to be refunded	$
				charged	$ 930.00

a. [ ] A check in the amount of $_____ to cover the above fees is enclosed.

b. [X] Please charge my Deposit Account No. 50-0280 in the amount of $ 930.00 to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required now or in the future under 37 CFR 1.16 or 37 CFR 1.17, including any present or future time extension fees which may be required, or credit any overpayment to Deposit Account No. 50-0280 . Two duplicate copy of this sheet is enclosed.

Note: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

Send all correspondence to:

Motorola, Inc.
Intellectual Property Department, MS E230
5401 North Beach Street
Fort Worth Texas, 76137

L. Bruce Terry
Attorney for Applicant(s)
Reg. No.: 38,336
Telephone: (817) 245-4248
Fax No.: (817) 245-2137

3/PRTS

COMMUNICATION SYSTEM AND METHOD FOR COMMUNICATION

Field of the Invention

This invention relates to a communication system comprising at least one central and a number of remote units and employing a shared frequency band.

Background of the Invention

Communication systems including at least one central and a number of remote units typically use separate portions of the frequency spectrum or frequency bands for the uplink (remote units transmitting to the central station) and the downlink (the central station transmitting to the remote units). A typical example of such a system is the Global System for Mobile telecommunication (GSM) where the uplink and downlink are transmitted in different frequency bands 45 MHz apart.

A major disadvantage with separate frequency bands is the inflexibility caused by the need for a fixed allocation of total spectrum used for the uplink and for the downlink.

In many systems the total traffic distribution between the uplink and downlink vary significantly with time. A fixed allocation of spectrum for each direction therefore requires dimensioning for worst case scenarios in the up- and downlink independently whereas the total traffic may be significantly less than the sum of the individual worst case situations. A significant improvement can be obtained if the spectrum can be dynamically allocated between the uplink and downlink.

As an example it has been identified that the variation in time of the traffic distribution between the uplink and downlink in the future Universal Mobile Telecommunication System (UMTS) will be very large. As a result it has been specified that it will be advantageous if the UMTS air interface will be able to share spectrum dynamically between uplink and downlink.

Separation of different radio signals in communication systems is achieved by separation in either time, frequency, code or a combination thereof. However, when sharing the same spectrum between uplink and downlink the separation becomes increasingly difficult as the power variation between desired and undesired signals can be extremely large. A typical example is the situation where a remote unit is located on the edge of the coverage area and therefore receives a very weak signal from the central station. At the same time a nearby remote unit may transmit to the central station using high power as it is also close to the edge of the coverage area thereby causing a very strong interfering signal.

If the signals are separated in time, such as in a Time Division Duplex (TDD) scheme the interference can be constrained to time intervals not used by the current remote unit and separation can therefore be very effective. However, the requirement for guard time between transmission and reception makes a time division scheme impractical for anything beyond very small cells (typically less than one kilometre). Division in frequency requires a very large attenuation of the unwanted signal due to the high power variation between the signals and this imposes very strict requirements on the filters resulting in large and expensive filters. Similarly, division in code will also require a very large attenuation of the unwanted signal due to the high power variation and this will result in the need for very long codes which complicates the receiver design significantly.

A new invention is therefore desired for facilitating the sharing of spectrum between the uplink and downlink.

Summary of the Invention

According to the present invention, there is provided a communication system including a first central station, a plurality of remote units, and a frequency spectrum for providing communication services to the plurality of remote units, the communication system comprising: means for transmitting between the first central station and a first remote unit in a first portion of the frequency spectrum in a first direction using a first transmission scheme;

and the communication system being characterised by comprising: means for transmitting simultaneously between the first central station and a second remote unit in the first portion of the frequency spectrum in a second direction using a second transmission scheme.

The different transmission schemes are preferably characterised by one having the signal energy spread in preferably both the time and frequency domain whereas the other transmission scheme having signal energy concentrated in preferably both the frequency and time domain.

According to one feature of the invention the spread energy signals can be spread un-evenly thereby concentrating signal energy in frequencies with the minimum cross-directional interference. According to another feature of the invention, remote units may be allocated spectrum so that units uplinking and downlinking in the shared portion of the frequency spectrum are separated geographically thereby increasing the minimum coupling loss between the units and thus minimising the interference.

According to a second aspect of the invention there is provided a method for communication in a communication system including a first central station, a plurality of remote units, and a frequency spectrum for providing communication services to the plurality of remote units, the method comprising the steps of: transmitting between the first central station and a first remote unit in a first portion of the frequency spectrum in a first direction using a first transmission scheme; and the method being characterised by comprising the step of: transmitting simultaneously between the first central station and a second remote unit in the first portion of the frequency spectrum in a second direction using a second transmission scheme.

Brief Description of the Drawings

FIG. 1 is an illustration of a typical communication system to which this invention may apply.

FIG. 2 is an illustration of frequency band allocation for uplink and downlink traffic in a preferred embodiment.

FIG. 3 is an illustration of a preferred embodiment of a remote unit.

FIG. 4 is an illustration of an example of signal energies spread or concentrated according to the invention.

FIG. 5 is an illustration of an uneven spreading of signal energy applied to the spread energy signal.

FIG. 6 is an illustration of a preferred allocation of channels in the shared frequency band to remote units.

FIG. 7 is an illustration of a process flowchart of a preferred method of allocating channels to users.

Detailed Description of a Preferred Embodiment

According to the present invention, a communication system 100 allowing sharing of spectrum between the uplink and downlink is provided, the system comprising at least one central station and a plurality of remote units. FIG. 1 illustrates such a system where a central station 101 communicates with a number of remote units 103 over radio channels 105. Specifically, the communication system can be a cellular system where the central station covers users within a certain geographical area 107 whereas other geographical areas 109,111 are covered by other central stations 113,115. An example of such a system is the UMTS cellular system undergoing standardisation in the European Telecommunications Standards Institute.

According to the present invention at least a portion of the spectrum is allocated for simultaneous use in the uplink and downlink direction. A

preferred spectrum allocation 200 is shown in FIG. 2. A portion of the spectrum is allocated for uplink 201, another for downlink 205 and a third is shared between up- and downlink 203. It is preferred that call setup is performed using the separate up- and downlink portions of the frequency spectrum 201,205 as the interference in these bands are expected to be less than in the shared spectrum 203. The interference in the shared spectrum can be very severe in some situations for example if a remote unit using this band for uplink is very close to a remote unit using the same spectrum for downlink.

The principle of the current invention is to use a hybrid air interface at least in the shared portion of the frequency spectrum by employing different transmission schemes which cause the least cross-interference between the uplink and downlink. The preferred system will spread the signal energy in one direction as much as possible while concentrating the signal energy as much as possible in the other direction. The spreading of energy in one direction will preferably be in both the time and frequency domain and similarly the concentration of signal energy in the other direction will also preferably be in both the time and frequency domain.

A preferred implementation of a remote unit 103 is illustrated in FIG. 3. The remote unit 103 comprises an antenna 301 connected to a duplexer 311 which again is connected to a receiver unit 303 and transmitter unit 309. The receiver and transmitter units 303,309 are connected to a controller 305 which is connected to a user interface 307. The remote unit 103 thus provides means for transmission and reception of user data under the control of a controller 305. The transmitting unit 309 is able to transmit using a different transmission scheme than the receiving unit 303. For example according to the invention the transmitting unit 309 can employ a time continuous broadband signal whereas the receiving unit 303 can employ a time division narrow band signal. In addition the transmitter unit 309 and receiver unit 303 may be able to use a plurality of transmission schemes and operate in a plurality of different frequency bands. The central station 101 is similar to the remote units 103 but the transmission schemes available will typically be reciprocal to the remote units 103, so that the transmission schemes available to the receiving unit 303 in the remote unit 103 will be available in the transmitting unit 309 of the central station 101 and vice

versa. Which transmission scheme to use is determined in the controller 305 in the remote units 103, the central station 101 or may be distributed throughout the system. The details of receiver and transmitter design for various transmission schemes are well known in the art, and the skilled person may use any known method of transmitter or receiver design without detracting from the present invention.

A preferred energy distribution 400 is illustrated in FIG. 4 where a spread energy signal 401 and concentrated energy signals 403 are shown.

When considering the frequency domain the spread energy signal 401 corresponds to a broadband signal where the radio signal occupies a relatively high bandwidth but has relatively low spectral energy density. Preferably the signal is spread using a spread spectrum technique as is well known in the art. Other alternatives for spreading the signal include known techniques such as frequency hopping or increasing the bandwidth of the signal by introducing redundant data. An example of the latter is the use of Forward Error Correcting (FEC) codes which allows transmission at lower spectral power density and increased bandwidth. The concentrated energy signals corresponds to standard narrowband signals where no or limited frequency spreading is applied.

When considering the time domain, the spread energy signal corresponds to a signal of long duration in comparison to the transmissions of the concentrated energy signal, preferably it is a continuous signal. The concentrated energy signal corresponds to a signal which performs the transmissions in short bursts rather than continuous transmissions. These signals are for example used in TDMA communication systems. The spread energy signal is thus characterised by having a relatively low variation in transmitted power whereas the concentrated energy signal will have high peak power during transmission bursts.

When receiving the signals the high disparity between the two transmission formats will provide significant benefits in terms of reduction of the interference level, the possibility of using interference reduction receiver techniques and the possibility of using techniques minimising the impact of the given interference.

When receiving the concentrated energy signal such as a non-frequency spread TDMA signal, the interference energy from a possible nearby strong interferer will be spread in both time and frequency. The interference energy contained in the relevant time-slot and narrow frequency channel is therefore minimised. As an example, if a GSM speech call is considered a 200 kHz channel is used. Assuming an interfering signal is spread to 5 MHz (as is considered for UMTS), the interference power of this signal in the narrowband GSM channel will be reduced by 25 times i.e. by 14 dB. The reduction of interference power will substantially decrease the dynamic range requirement of the receiver. In addition the GSM TDMA signal has a duty cycle of 1/8 and the total reduction in interference energy is thus 200 times i.e. 23 dB.

When receiving the spread energy signal the concentrated energy signal can have a very high interference level but this will be concentrated preferably both in time and frequency. It is thus possible to remove this high interference by filtering using for example a notch filter. This will again remove a potentially very high interference level thereby significantly reducing the dynamic range requirements of the receiver. The filtering of the unwanted narrowband interferer will also remove a part of the wanted signal. However, as the filtering is concentrated to a narrow bandwidth and a short timeslot, this effect will be acceptable in most situations. The interferer will be constrained to a short time interval and extending the interleaving and FEC coding beyond this time interval will significantly reduce the amount of bit errors caused by the interferer. If the energy concentrated signal is a TDMA signal the interleaving and coding will preferably extend over an entire frame length

In accordance with the invention the interference levels can be further reduced by spreading the spread energy signal unevenly in frequency depending on the interference to and from remote units using the shared spectrum for communicating in the other direction. This is illustrated in FIG. 5 where an evenly spread signal 501, an unevenly spread signal 503 and narrowband signals 505 are shown, the spread signals representing communication in one direction and the narrowband signals representing communication in the other direction. By concentrating the spread signal

energy towards the spectrum not used by narrowband signals, the interference to and from these is reduced

As an example spreading codes used for current CDMA systems are optimised for a flat frequency response as this gives optimum performance for a pure CDMA system. However, in the proposed system there can be much higher interference in some frequency bands than in others and it is therefore preferred to use non-flat spreading codes which concentrate the CDMA signal energy towards frequencies with minimum interference. For example, if the narrowband interferers are allocated towards the higher frequencies, a spreading code concentrating energy towards lower frequencies can be used (ref. FIG. 5). Any other distribution is equally applicable to the current invention, for example allocating narrowband carriers periodically or towards the lower or middle part of the frequency bands in order to optimise the system for the given spectral shaping of the spread signal. The method can be used adaptively dependent on the number and level of narrowband interferers. The shaping of the spreading can either be obtained by changing the spreading code or by modifying the pulseshape of the spreading signal. If the spreading is done using frequency hopping, the effect can be obtained simply by increasing the concentration of hops to frequency bands with less interference.

Another aspect of the invention concerns the reduction of interference between remote units in the described communication system by allocation of channels in the shared portion of the frequency spectrum to remote units geographically separated. An example of the principle of allocation is illustrated in FIG. 6 which shows one central station 601, a plurality of remote units 603 and three areas 605, 607 and 609 dividing the remote units into groups depending on their distance to the central station 601. According to the invention calls can be set up using the dedicated portions of the frequency spectrum, and as desired calls can be allocated channels in the shared spectrum in such a way, that they use the shared spectrum for communication in one direction and the appropriate dedicated spectrum for communication in the other direction. The principle of allocation of the shared spectrum is that it is used in one direction by the remote units closest to the central station and in the reverse direction by the remote units furthest from the central station. With reference to the figure, remote units

603 in area 605 will thus be allocated for example downlink channels in the shared spectrum and uplink channels in the dedicated uplink frequency spectrum whereas the remote units in area 609 will be allocated uplink channels in the shared spectrum and downlink channels in the dedicated spectrum. The basic principle is thus to allocate channels so that remote units uplinking in the shared spectrum are kept as far as possible from the remote units downlinking. This maximises the minimum coupling loss between remote units sharing spectrum and thereby minimises interference.

FIG. 7 is an illustration of a process flowchart 700 of a preferred embodiment of this method. The method is preferably implemented in the controller of the central station 601 but may be implemented in the remote units 603 or distributed throughout the system.

The process starts in step 701 where the distance between the central station 601 and the remote unit 603 is estimated. The further the remote unit 603 is from the central station 601 the higher the propagation loss and the preferred method of estimating the distance is therefore from measurement of the received signal strength and knowledge of the transmitted power level, or simply from knowledge of the transmitted power level for a given transmission quality. However, other alternatives include measurement of transmission delay, such as timing advance for GSM systems, or using location information, such as information from Global Positioning System receivers included in the remote units as is envisaged for some future communication systems.

Step 703 follows from step 701 and consists in allocating radio channels in the shared portion of the frequency spectrum to the furthest of the remote units 603. The allocation is such that the remote units 603 are allocated channels in one direction in the appropriate non-shared spectrum and channels in the second direction in the shared spectrum.

Step 705 which follows from step 701 and may be independent of step 703 allocates channels to the closest remote units 603. The allocation is reciprocal to the allocation of channels to the furthest remote units in step 703. The remote units are thus allocated channels in the appropriate non-shared spectrum for communication in the direction in which the furthest

remote units 603 use the shared spectrum. The closest remote units 603 are furthermore allocated channels in the reverse direction in the shared frequency spectrum but utilising a different transmission scheme in accordance with the invention.

The invention thus provides a communication system or method of communication based on using different transmission schemes in the uplink and downlink direction. The use of two different transmission schemes allows for the uplink and downlink signals to have a large disparity and this enables the cross interference between these signals to be minimised. As a consequence the sharing of a portion of frequency spectrum for simultaneously communicating in both directions is substantially facilitated.

Claims

1. A communication system (100) including a first central station (101), a plurality of remote units (103), and a frequency spectrum for providing communication services to the plurality of remote units, the communication system comprising:

means for transmitting between the first central station(101) and a first remote unit (103) in a first portion (203) of the frequency spectrum in a first direction using a first transmission scheme;

and the communication system being characterised by comprising:

means for transmitting simultaneously between the first central station (101) and a second remote unit in the first portion (203) of the frequency spectrum in a second direction using a second transmission scheme.

2. A communication system as claimed in Claim 1 characterised by said first transmission scheme using spread energy signals and said second transmission scheme using concentrated energy signals.

3. A communication system as claimed in Claim 1 characterised by said first transmission scheme using a substantially time continuous signal with low power variation, and said second transmission scheme using a time discontinuous signal with high peak power during transmission bursts.

4. A communication system as claimed in Claim 1 characterised by the use of a Time Division Multiple Access (TDMA) scheme in said first direction and Code Division Multiple Access (CDMA) in said second direction.

5. A communication system as claimed in Claim 1 characterised by the use of an Orthogonal Frequency Division Multiple Access (OFDMA) scheme in said first direction and Code Division Multiple Access (CDMA) in said second direction.

6. A communication system as claimed in Claim 1 characterised by a second portion (201) of said frequency spectrum being dedicated to communication in said first direction and a third portion (205) of said

frequency spectrum being dedicated to communication in said second direction.

7. A communication system as claimed in claim 6 further including a controller (305) for allocating users characterised by comprising:

a) means for estimating a distance from said first central station to said plurality of remote units (103);

b) means for allocating channels to the furthest of said plurality of remote units (103) in said first portion (203) of the frequency spectrum for communicating in said first direction and in said third portion (205) of the frequency spectrum for communicating in said second direction; and

c) means for allocating channels to the closest of said plurality of remote units (103) in said first portion (203) of the frequency spectrum for communication in said second direction and in said second portion (201) of said frequency spectrum for communicating in said first direction.

8. A communication system as claimed in Claim 1 characterised by said first transmission scheme using broadband signals (401) with low spectral energy density and said second transmission scheme using narrowband signals (403) with high spectral energy density.

9. A communication system as claimed in Claim 8 characterised by said broadband signals (503) being unevenly spread signals.

10. A communication system as claimed in Claim 8 characterised by further comprising
means for selectively removing said narrowband signals (403) when receiving said broadband signals (401).

11. A method for communication in a communication system (100) including a first central station (101), a plurality of remote units (103), and a frequency spectrum for providing communication services to the plurality of remote units, the method comprising the steps of:

transmitting between the first central station (101) and a first remote unit (103) in a first portion (203) of the frequency spectrum in a first direction using a first transmission scheme;
and the method being characterised by comprising the step of:

transmitting simultaneously between the first central station (101) and a second remote unit in the first portion (203) of the frequency spectrum in a second direction using a second transmission scheme.

5

COMMUNICATION SYSTEM AND METHOD FOR COMMUNICATION

Abstract of the Disclosure

A communication system (100) including at least one central (101) and a number of remote units (103) is provided which utilise a shared spectrum (203) for simultaneous communication in the uplink and downlink direction. According to the invention different transmission schemes are used in the two directions for reducing the cross interference between remote units (103) uplinking and remote units (103) downlinking in the shared spectrum. The different transmission schemes are characterised by one (401) having the signal energy spread in preferably both the time and frequency domain whereas the other (403) transmission scheme is characterised by having signal energy concentrated in both the frequency and time domain.

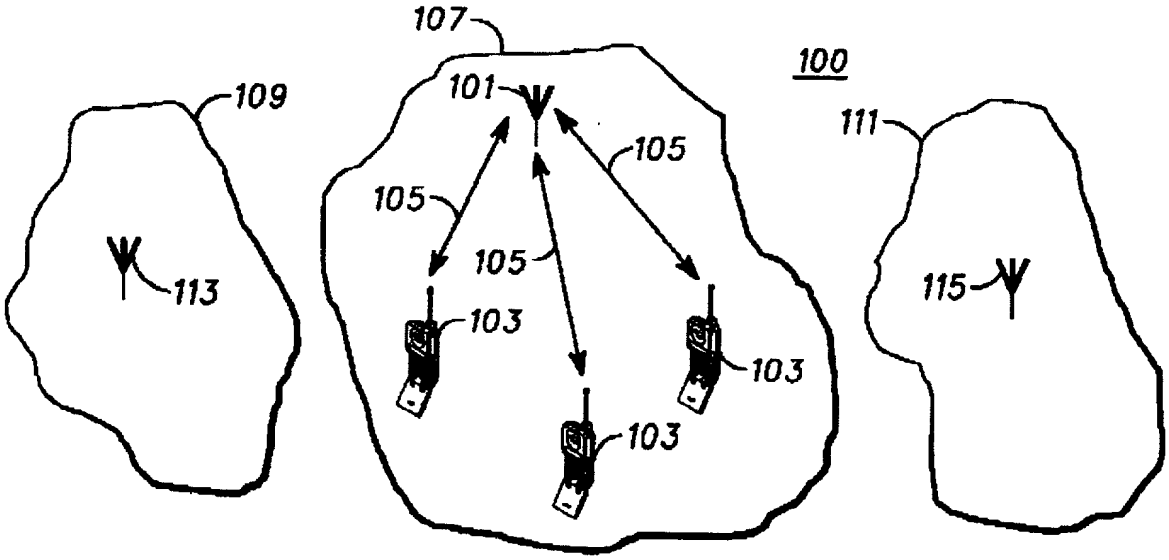

FIG.1

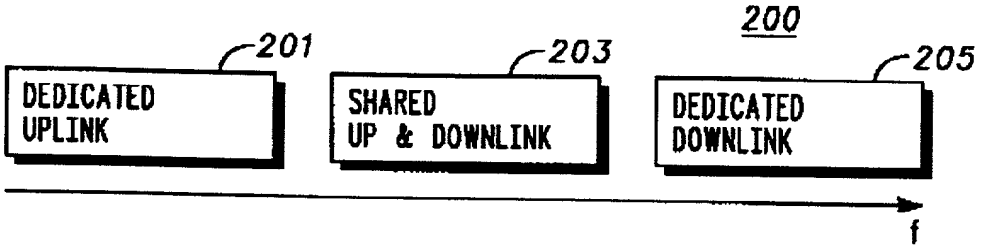

FIG.2

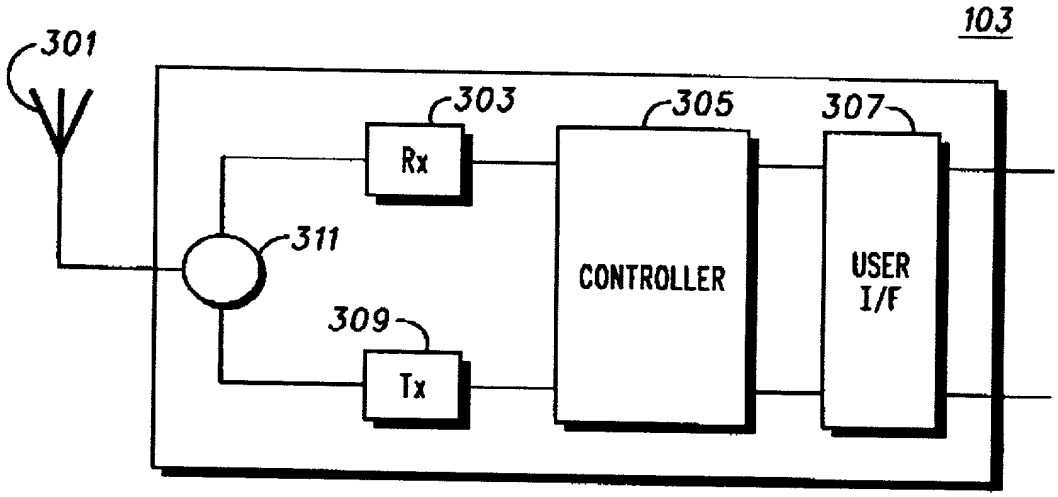

FIG.3

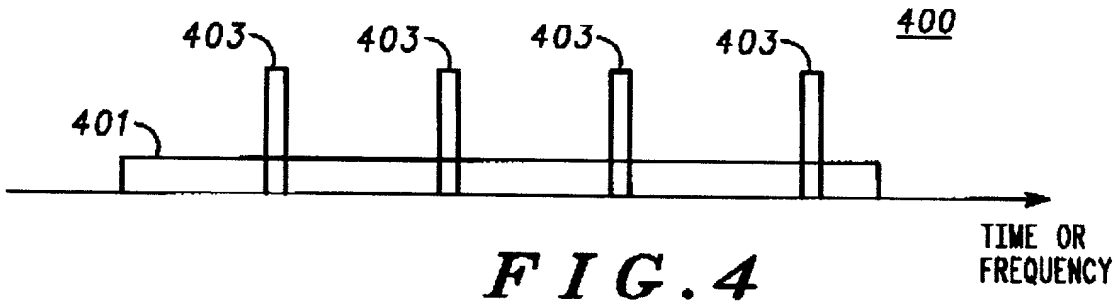

FIG. 4

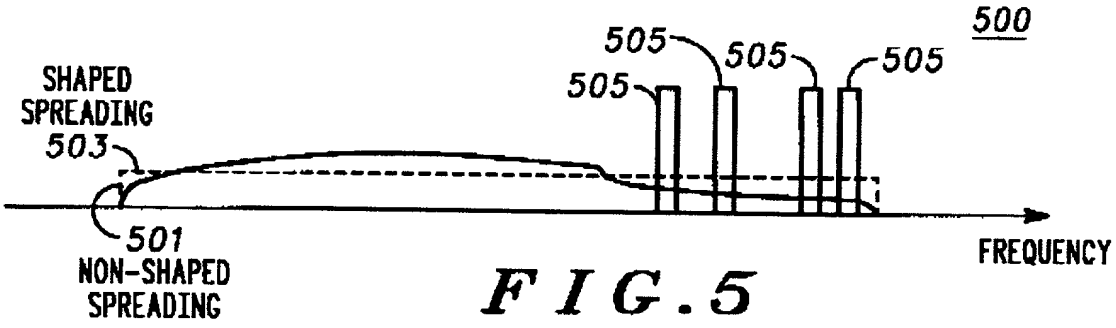

FIG. 5

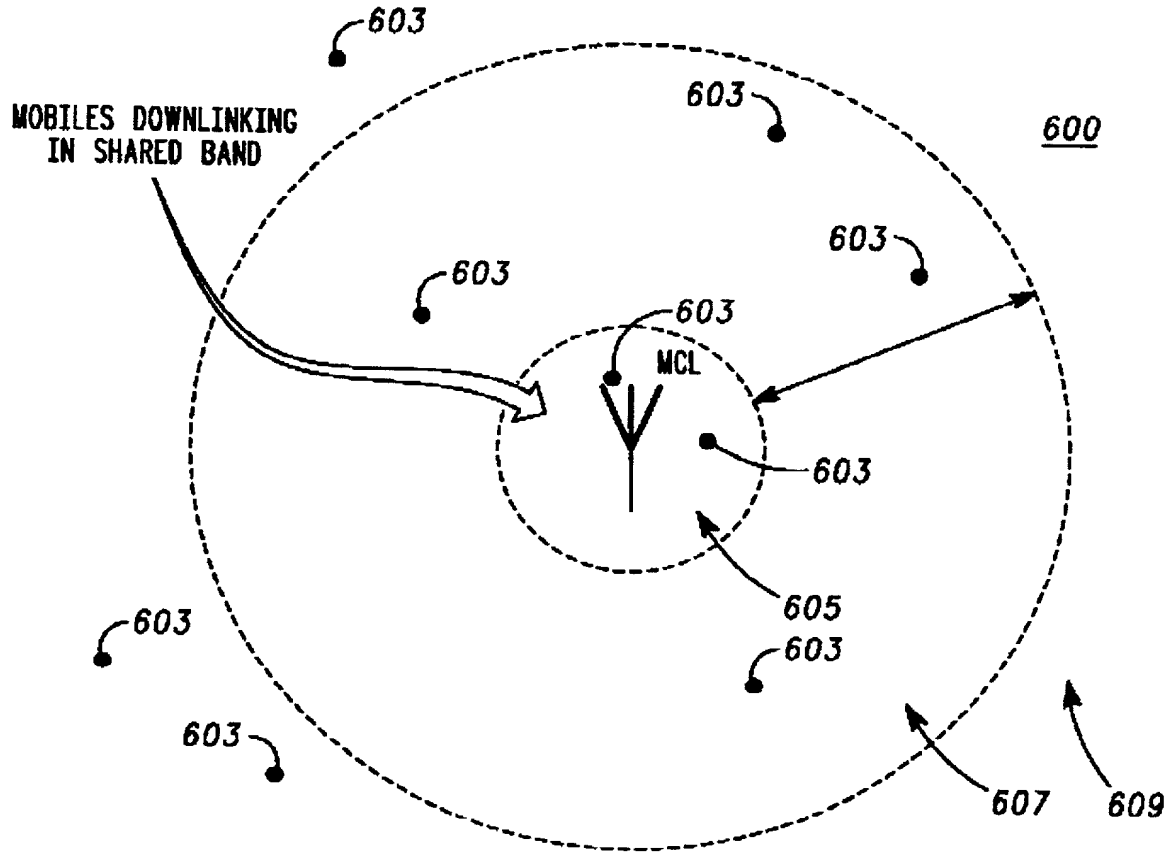

FIG. 6

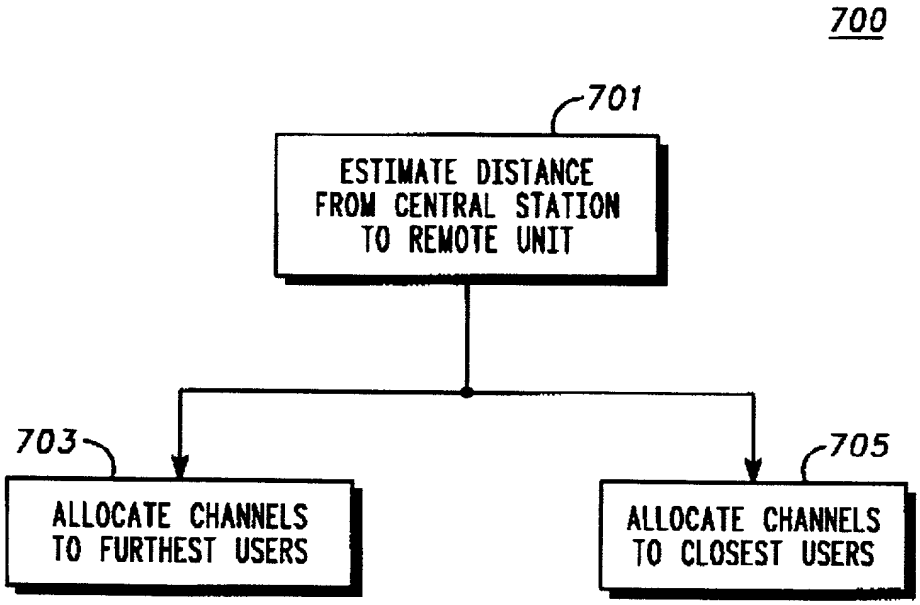

FIG. 7

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Attorney Docket CE30382P

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled COMMUNICATION SYSTEM AND METHOD FOR COMMUNICATION, the specification of which is attached hereto unless the following box is checked:

☐ Application was filed on 10/21/98 in the U.S.
as Application No. 09/530,310
and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Claimed
9722511.4 (Number)	GBRI (Country)	27 October 1997 (Day/Month/Year Filed)	☑ Yes ☐ No
PCT/EP98/06985 (Number)	PCT (Country)	21 October 1998 (Day/Month/Year Filed)	☑ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Jonathan P. Meyer, Reg. No. 30,477; Doug Fekete, Reg. No. 29,065; K. Cyrus Khosravi, Reg. No. 40,375; Steven G Parmelee, Reg. No. 28,790; J. Ray Wood, Reg. No. 36,062; Daniel K. Nichols, Reg. No. 29,420; Val Jean Hillman, Reg. No. 34,841; Susan L. Lukasik, Reg. No. 35,261; Terri S. Hughes, Reg. No. 41,856; Steven R. Santema, Reg. No. 40,156.

Address all telephone calls to Mr. Jonathan P. Meyer at telephone no. (847) 576 0173.

Address all correspondence to Jonathan P. Meyer, Motorola, Inc., Intellectual Property Section - Law Department, 1303 East Algonquin Road, Schaumburg, IL 60196.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE:
JEPSEN, Rene		20-7-00
RESIDENCE:		CITIZENSHIP:
5 Bancroft Close, Grange Park, Swindon , Wiltshire SN5 6HB, UK		United Kingdom
POST OFFICE ADDRESS:		
Same as above		

FULL NAME OF SECOND INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE.
O'NEILL, Rorie	Rorie O'Neill	20-7-00
RESIDENCE:		CITIZENSHIP.
25 Applewood Court, Westlea,, Swindon Wiltshire SN2 7AH, UK		United Kingdom
POST OFFICE ADDRESS:		
Same as above		

FULL NAME OF THIRD INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE:
KARIMI, Reza		20-7-00
RESIDENCE:		CITIZENSHIP:
17 Hodds Hill, , Swindon, Wiltshire SN5 5BJ, UK		United Kingdom
POST OFFICE ADDRESS		
Same as above		

FULL NAME OF FOURTH INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE	DATE:
MOHEBBI, Behzad		
RESIDENCE:		CITIZENSHIP
12774 Torrey Bluff Drive Appt. 90, San Diego, CA92130, USA		United States
POST OFFICE ADDRESS		

JOINT PATENT
CE30382P

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Jonathan P. Meyer, Reg. No. 30,477; Doug Fekete, Reg. No. 29,065; K. Cyrus Khosravi, Reg. No. 40,375; Steven G Parmelee, Reg. No. 28,790; J. Ray Wood, Reg. No. 36,062; Daniel K. Nichols, Reg. No. 29,420; Val Jean Hillman, Reg. No. 34,841; Susan L. Lukasik, Reg. No. 35,261; Terri S. Hughes, Reg. No. 41,856; Steven R. Santema, Reg. No. 40,156.

Address all telephone calls to Mr. Jonathan P. Meyer at telephone no. (847) 576 0173.

Address all correspondence to Jonathan P. Meyer, Motorola, Inc., Intellectual Property Section - Law Department, 1303 East Algonquin Road, Schaumburg, IL 60196.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE:	DATE:
JEPSEN, Rene		20-7-00
RESIDENCE:		CITIZENSHIP:
5 Bancroft Close, Grange Park, Swindon , Wiltshire SN5 6HB, UK		United Kingdom
POST OFFICE ADDRESS:		
Same as above		

FULL NAME OF SECOND INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE:	DATE:
O'NEILL, Rorie	Rorie O'Neill	20-7-00
RESIDENCE:		CITIZENSHIP:
25 Applewood Court, Westlea,, Swindon, Wiltshire SN2 7AH, UK		United Kingdom
POST OFFICE ADDRESS:		
Same as above		

FULL NAME OF THIRD INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE:	DATE:
KARIMI, Reza		20-7-00
RESIDENCE:		CITIZENSHIP:
17 Hodds Hill, , Swindon, Wiltshire SN5 5BJ, UK		United Kingdom
POST OFFICE ADDRESS:		
Same as above		

FULL NAME OF FOURTH INVENTOR: FIRST MIDDLE LAST	INVENTOR'S SIGNATURE:	DATE:
MOHEBBI, Behzad		19/9/2000
RESIDENCE:		CITIZENSHIP: UK ~~United States~~
12774 Torrey Bluff Drive Appt. 90, San Diego, CA92130, USA		
~~POST OFFICE ADDRESS:~~		